



1519 Airport Rd.
Jennings, LA 70546

Office: 337-616-9755

Fax: 337-821-0087

www.oqmeasurement.com

2121 Brittmoore Rd., Suite 1000
Houston, TX 77043

Office: 713-896-8266

Fax: 713-896-8225

Static Mixer Specifications

OQ-SM-2-150-F

OQ-SM-2-150-G



Static Mixer Features

- Single Mixing Vane, 1/16" thick
- 2 Vanes, 1/16" thick
- 3 Vanes, 1/16" thick

Sample Point Optional

Static Mixer Material

A53 GRB Carbon Steel is standard.
Stainless Steel available.

Static Mixer Ordering Information by Part Number:

OQ-Pipe Size-PSI rating-Flanged
or Grooved

EX: OQ-SM-2-150-F (Flanged)

EX: OQ-SM-2-150-G (Grooved)

Process Connections

ANSI RF 150#, 300#, 600# (others by special order)

Grooved 2", 3", 4", 6", (others by special order)

Pressure Ratings


As per Flange selection, 1440 psig max
(Victaulic grooved - 350 psig)

Temperature Range

0°F to 180°F standard

-20°F to 375°F standard

Dimensions - OQ Static Mixer Specifications

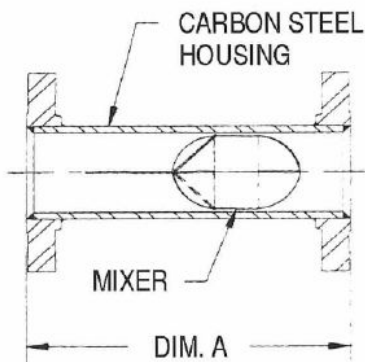

Size	Dim. A
2 Inch	9"
3 Inch	11"
4 Inch	12"
6 Inch	18"
8 Inch +	Consult OQ Measurement

0°F to 180°F dimension given. For -20°F to 375°F dimension add 6.4".

NOTE: Dimensions-Inches to the nearest tenth (millimeters to the nearest whole mm), each independently dimensioned from respective engineering drawing.